

Compact workbenches

+ Utmost stability

housing can be loaded with up to 1.0 t.,
all connections welded

+ Space-saving and well-organised storage

in variable substructures with smooth-running drawers
with 75 kg supported load and a wide range of
partition material

+ Secure locking system

with KEY Lock locking system for simultaneous
protection of all drawers and doors against
unauthorised access

+ Great design diversity

thanks to the wide range of components,
substructures, materials and surfaces

+ Easy to use and highly ergonomic

with height-adjustable workbench legs for
optimum working heights and leg room – also
available for our modular superstructure system

+ Easily adaptable to new working environments

through flexible integration and reconfiguration
of the modular system

>> Universal superstructures

see p. 132

Compact workbenches made by LISTA provide versatile, modern workstations for production, workshop and hobby use. Their robust design and high-quality materials make them especially durable and able to withstand even severe conditions. Various substructures ensure that there is plenty of storage space.




Art. no. **64.127.020**
Pale grey, RAL 7035

D ↗ 700 mm **H** ↑ 840 / 850 mm

500 × 600 mm


	Top width mm	Housing mm	H ↑ mm		Number of drawers mm	Compartments with doors	Shelves	Art. no.
	1000	640	840	Multiplex	1: 1 × 150	1 × 350	1	64.103.XXX
	1000	640	850	Beech	1: 1 × 150	1 × 350	1	64.105.XXX
	1000	640	840	Multiplex	4: 2 × 100 / 2 × 150	-	-	64.106.XXX
	1000	640	850	Beech	4: 2 × 100 / 2 × 150	-	-	64.108.XXX
	1500	1230	840	Multiplex	4: 2 × 75 / 1 × 150 / 1 × 200	1 × 500	2	64.115.XXX
	1500	1230	850	Beech	4: 2 × 75 / 1 × 150 / 1 × 200	1 × 500	2	64.117.XXX
	1500	1230	840	Multiplex	2: 2 × 150	2 × 350	2	64.118.XXX
	1500	1230	850	Beech	2: 2 × 150	2 × 350	2	64.120.XXX
	2000	1820	840	Multiplex	4: 3 × 150 / 1 × 200	1 × 350	3	64.124.XXX
	2000	1820	850	Beech	4: 3 × 150 / 1 × 200	1 × 350	3	64.126.XXX
	2000	1820	840	Multiplex	7: 5 × 100 / 2 × 150	2 × 350	2	64.127.XXX
	2000	1820	850	Beech	7: 5 × 100 / 2 × 150	2 × 350	2	64.129.XXX
	2000	1820	840	Multiplex	2: 2 × 150	2 × 350	2 / 2*	64.130.XXX
	2000	1820	850	Beech	2: 2 × 150	2 × 350	2 / 2*	64.132.XXX
	2500	2410	840	Multiplex	10: 4 × 75 / 4 × 100 / 2 × 150	2 × 500	4	64.133.XXX
	2500	2410	850	Beech	10: 4 × 75 / 4 × 100 / 2 × 150	2 × 500	4	64.135.XXX
	3000	2410	840	Multiplex	10: 4 × 75 / 4 × 100 / 2 × 150	2 × 500	4	64.136.XXX
	3000	2410	850	Beech	10: 4 × 75 / 4 × 100 / 2 × 150	2 × 500	4	64.138.XXX

* centre recessed shelves.




Plastic box set

For drawer height mm	Art. no.
75	56.160.000
100, 125	56.161.000
12 plastic boxes:	100 × 200 mm
6 plastic boxes:	100 × 100 mm



Partition set

For drawer height mm	Art. no.
75	56.172.000
100, 125	56.173.000
150	56.174.000
4 lengthwise dividers	
10 crosswise dividers	100 mm



Partition set

For drawer height mm	Art. no.
75	56.175.000
100, 125	56.176.000
150	56.177.000
200, 150	56.178.000
3 lengthwise dividers	
4 crosswise dividers	100 mm
4 crosswise dividers	150 mm


Compact workbenches

With Multiplex or beech worktop and housing.

Multiplex top thickness	40 mm
Beech top thickness	50 mm
Height of workbench substructure	800 mm
Depth of housing/ worktop	695 / 700 mm
Drawer load capacity	75 kg
Shelf load capacity	25 kg

Note

Preconfigured workbenches are equipped with various types of locks. Other worktop specifications (Urphen, chrome steel coating) on request.



Universal superstructures

The modular system – for universal use with all LISTA workbenches and workstation systems. The compatible superstructure system stands out in terms of ease of integration. Only compatible when mounting on table top.

- Universal superstructures see p. 132
- Separate components see p. 154



High load capacity up to 1.0 t

The sturdy construction and high-quality materials provide a stable system. Can therefore handle total loads of up to 1.0 t without any problems.

For colour information see fold-out page. When ordering, please use the desired three-digit colour code (instead of XXX).



System workbenches

LISTA system workbenches give you a stable and affordable solution for workstations in workshops and production areas. These practical solutions not only impress with their robust design and quality but also offer outstanding value for money.

- 
- + Utmost stability**
housing has a load capacity of up to 1.0 t with strong construction components
 - + Space-saving and well-organised storage**
in variable substructures with smooth-running drawers with up to 50 kg supported load and a wide range of partition material
 - + Secure locking system**
with KEY Lock locking system for simultaneous protection of all drawers and doors against unauthorised access
 - + Fully mobile**
can be equipped with rubber castors for mobile use in a variety of workplaces
 - >> Universal superstructures**
see p. 132



Art. no. **41.769.050**
 Housing: Light grey, RAL 7035.
 Fronts: Metallic grey, NCS S 6502-B
 (excluding vice)

D **700 mm** **H** **840 / 877 mm**

459 x 510 mm

	Top width mm	Housing mm			Number of drawers mm	Compartments with doors	Adjustable shelves	Art. no.
	1250	1116	877	Multiplex	6: 2 x 75 / 4 x 150	1 x 450	-	41.514.XXX
	1250	1116	877	Multiplex	5: 2 x 75 / 1 x 100 / 1 x 150 / 1 x 200	1 x 600	1	41.769.XXX
	1500	1116	840	Multiplex	2: 2 x 150	2 x 450	-	41.430.XXX
	1500	1116	840	Multiplex	5: 1 x 100 / 3 x 150 / 1 x 200	1 x 450	-	41.438.XXX
	2000	1654	840	Multiplex	6: 6 x 150	2 x 450	-	41.721.XXX
	2000	1654	840	Multiplex	3: 3 x 200	1 x 600	2	41.722.XXX

System workbenches

With Multiplex top and housing.
 Multiplex top thickness **40 mm**
 Height of housing 680 mm
 Clear width of housing 600 mm
 Height of workbench leg assemblies 120 mm

All mobile system workbenches are also equipped with 1 push handle, 4 castor holders with 2 fixed and 2 swivel castors with brakes (solid rubber Ø 125 mm)
 Height of castor holders including castors 157 mm
 Load capacity 400 kg

Note: Preconfigured workbenches are equipped with various types of locks. Other worktop specifications on request.



Mobile workbench with push handle

Also available as mobile design with two swivel castors and two fixed castors made of solid rubber, with brakes and push handle, supported load per castor 100 kg. The push handle for mobile system workbenches is ergonomic and stable and made from plastic-coated tubular steel.



Universal superstructures


The modular system – for universal use with all LISTA workbenches and workstation systems. The compatible superstructure system stands out in terms of ease of integration.

Note
 Only compatible when mounting on table top.

Universal superstructures see p. 132


Separate components see p. 155

Note
 Internal drawer height lower than drawer front. For partition material height see p. 262–265.
 Partition material sets without clip-on label holder.




Trough sets

For drawer height mm	Art. no.
75–300	41.468.000
9 troughs:	4 trough parts, Ø33 mm*
40 trough walls:	4 trough parts, Ø33 mm*



Sets of plastic boxes

For drawer height mm	Art. no.
75	41.471.000
100	41.472.000
12 plastic boxes:	75 x 150 mm
3 plastic boxes:	150 x 150 mm



Slotted dividers and metal separators

For drawer height mm	Art. no.
75	41.477.000
100	41.478.000
150–300	41.479.000
2 slotted dividers:	30 E
6 metal separators:	9 E

* Note usable height of the drawer depending on the goods to be stored.



For colour information see fold-out page. When ordering, please use the desired three-digit colour code (instead of XXX).

COLOURS: With preconfigured system workbenches housing in light grey, RAL 7035.

Compact workbenches | Individual parts



Compact workbench substructure

To secure all drawers simultaneously, the workbench housing can be individually configured with the KEY Lock locking system. In addition, different drawer heights and doors can be selected.

D 700 mm **H** 800 mm



W for top width mm	1000	1500	2000	2500	3000
Base	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
without shelves	64.300.XXX	64.301.XXX	64.302.XXX	64.303.XXX	64.303.XXX
with 2 recessed shelves	–	–	64.304.XXX	–	–
housing (W × D mm)	640 × 695	1230 × 695	1820 × 695	2410 × 695	2410 × 695
Clear height (mm)	500	500	500	500	500
Number of compartments	1	2	3	4	4
+ KEY lock separately lockable	64.417.000	64.417.000	64.417.000	64.417.000	64.417.000
Number of locks required	1	1	2	2	2
Floor anchoring					
can be attached, retrofittable	90.177.000	90.177.000	90.177.000	90.177.000	90.177.000
Height adjustment					
retrofitable. Height-adjustable in 50 mm increments of 800–1050 mm. Colour: Anthracite grey, RAL 7016	64.414.000	64.414.000	64.414.000	64.409.000	64.409.000
	Set with 4 pieces	Set with 4 pieces	Set with 4 pieces	Set with 6 pieces	Set with 6 pieces



Multiplex panels

Beechwood top glued in multiple layers, sanded and surface-treated, bevelled top edges.

Thickness 40 mm

64.570.000 64.571.000 64.572.000 64.573.000 64.574.000*



Multiplex with chrome steel sheet coating

1,5 mm thick, bent down and screwed at the back, open on the sides, multiplex top is visible.

Thickness 40 mm

85.246.000 85.247.000 85.248.000 85.249.000 85.250.000



Beechwood top

solid glued beech top, sanded and surface-treated. Bevelled long edges, for high mechanical load.

Thickness 50 mm

64.580.000 64.581.000 64.582.000 64.582.000 64.584.000

*2 × 1500 mm with butt joint



Drawer

Every drawer has a full extension runner with a load capacity of 75 kg.

W × D Usable surface mm	500 × 600		
H Usable height mm	Cladding height mm	Art. no.	
75	60	45	64.400.XXX
100	85	75	64.401.XXX
150	135	125	64.403.XXX
200	185	175	64.404.XXX
250	235	175	64.405.XXX



Shelf

Galvanised and height adjustable. Shelf thickness 25 mm, load capacity 25 kg.

W	D	Art.-Nr.
600	600	64.413.000




Hinged door

Model: 1-wing.

H	W	Model	Art. no.
500	600	left / right	64.410.XXX
350	600	right	64.411.XXX
350	600	left	64.412.XXX


Ordering information see p. 155



System workbench substructure

Workbench base substructures with friction-locking plug and screw-type connection. External and internal panels with slotted perforations. For plugging in workbench installations. With central locking but without cylinder (must be ordered separately). Colour: Pale grey, RAL 7035.

D 700 mm **H** 800/837 mm for mobile



W for top width mm

	1250	1500	2000
Base	Art. no.	Art. no.	Art. no.
stationary	41.957.020	41.957.020	41.956.020
mobile*	41.958.020	–	–
housing (W × D mm)	1164 × 600	1164 × 600	1654 × 600
Clear height (mm)	600	600	600
Number of compartments	2	2	3
+ KEY lock separately lockable	41.603.000	41.603.000	41.603.000
Number of locks required	1	1	2

***Equipment:** 1 push handle, 4 castor supports with 2 block and 2 swivel castors with brakes (solid rubber Ø 100 mm)




Multiplex tops

Beechwood top glued in multiple layers, sanded and surface-treated, bevelled top edges.

Thickness
40 mm

	88.613.000	88.614.000	88.615.000
--	-------------------	-------------------	-------------------



Drawers

With ball bearing, inc. guide rails. The drawer walls have a slotted grid on all sides on the inside. The fronts are equipped with continuous handles with integrated label strips and transparent covers.

W × D	Usable surface mm		459 × 510	459 × 510
H	Usable height mm	Cladding height mm	Art. no.	Art. no.
75	60	50	41.598.XXX	41.725.XXX
100	90	75	41.599.XXX	41.726.XXX
150	140	125	41.600.XXX	41.727.XXX
200	190	125	41.601.XXX	41.728.XXX
300	290	125	41.602.XXX	41.729.XXX
Model			stationary	mobile
Load capacity			50 kg	30 kg

Hinged doors

Sheet steel door with plastic recessed grip. Optionally mounted on the right or left.

H	Model	Art. no.
450	left	41.583.XXX
450	right	41.584.XXX
600	left	41.585.XXX
600	right	41.586.XXX

Shelves


Shelves adjustable on a 25:25 mm grid, optionally as open compartments or behind a hinged door. Incl. shelf support. Shelf thickness 25 mm. Model: Sheet steel. Colour: Galvanised.

Shelf	Art. no.
	41.587.000
Usable dimensions (W × D)	493 × 539 mm

i Ordering information

When selecting drawers and hinged doors, the clear height of the base is decisive. The sum of the drawer front heights (C) must be equal to the clear height (B).

Compact workbenches

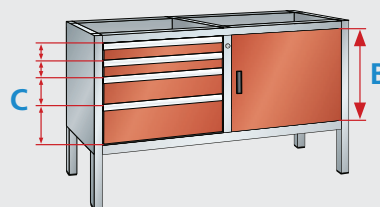

System workbenches



Vi kan skreddersy innredningen til ditt behov.

Vi står disponible til å bistå i deres prosjekter.

*3D tegninger.

*Oppmålinger.

*Kartlegging av behov.

*Montasje.

Ta gjerne kontakt med oss om du har et behov som ikke finnes i katalogen.



Lista ble grunnlagt i 1945

Hovedkontoret ligger i Sveits.



Produksjonen foregår i Sveits og Tyskland.



Kontaktinfo:

Ing Yngve Ege AS

Postadresse:
Postboks 1 Sentrum
0101 Oslo

Besøksadresse:
Ryenstubben 5
0679 Oslo

Tel: 23 24 10 00
Fax: 23 24 10 01

ege@ege.no

Produktansvarlig.

Navn:

Telefon:

Epost: